

# CAMSO LM L3



WHEEL LOADERS



## MULTI-SURFACE PERFORMANCE

Delivers optimized performance on all surfaces. With enhanced side impact resistance and improved stability, it reduces flats and improves ride quality in all types of applications.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



# CAMSO LM L3



**HEAVY-DUTY CARCASS**

- Increases side impact resistance and stability

**STEPPED TREAD DESIGN**

- Enhances tread cleanout for improved traction


**NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO**

- Ensures even tread wearing for greater durability

**DEEP AND FLAT TREAD PROFILE**

- Reduces tread crowning for improved durability

TIRE SIZE	PR	ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	MAXIMUM TIRE LOAD [lb] VERSUS INFLATION PRESSURE [PSI]											
		O.D [in]	O.W [in]	O.T.D [32nd]				36	39	43	46	50	54	57	61	64	68	71	
15.5-25	12	50.5	16.4	33	168	A2	L3	9400	9900	10300	10750	11250	11800	12350	-	-	-	-	
					142	A8	G3	-	-	-	-	-	-	-	-	-	-	-	
					149	B	E3	7150	-	-	-	-	-	-	-	-	-	-	-
15.5-25	16	50.6	16.0	33	175	A2	L3	9400	9900	10300	10750	11250	11800	12350	12800	13250	13600	14150	
					146	A8	G3	6200	6600	-	-	-	-	-	-	-	-	-	-
					156	B	E3	7150	8050	8850	-	-	-	-	-	-	-	-	-
17.5-25	12	54.3	18.4	33	171	A2	L3	11150	11800	12350	13000	13600	-	-	-	-	-	-	
					145	A8	G3	-	-	-	-	-	-	-	-	-	-	-	-
					153	B	E3	-	-	-	-	-	-	-	-	-	-	-	-
17.5-25	16	54.8	18.1	33	177	A2	L3	11150	11800	12350	13000	13600	14150	14700	15250	15650	16100	-	
					150	A8	G3	6850	7400	-	-	-	-	-	-	-	-	-	-
					158	B	E3	8500	8950	9400	-	-	-	-	-	-	-	-	-
17.5-25	20	53.7	18.8	35	181	A2	L3	11150	11800	12350	13000	13600	14150	14700	15250	15650	16100	16550	
					164	B	E3	8500	8950	9400	9800	10250	10700	11050	-	-	-	-	
					181	A2	L3	14800	15650	16550	17450	18200	-	-	-	-	-	-	
20.5-25	16	59.2	21.5	40	156	A8	G3	-	-	-	-	-	-	-	-	-	-	-	
					167	B	E3	11350	12050	-	-	-	-	-	-	-	-	-	
					186	A2	L3	14800	15650	16550	17450	18200	18850	19600	20300	20950	-	-	
20.5-25	20	59.5	21.7	38	170	B	E3	11350	12050	12700	13250	-	-	-	-	-	-	-	
					191	A2	L3	18750	19850	20950	22100	22950	24050	-	-	-	-	-	
					177	B	E3	14450	15350	16100	-	-	-	-	-	-	-	-	
23.5-25	24	64.2	24.8	47	196	A2	L3	18750	19850	20950	22100	22950	24050	24950	25850	26700	27600	-	
					180	B	E3	14450	15350	16100	16900	17650	-	-	-	-	-	-	
					198	A2	L3	24300	25400	26600	27900	29150	-	-	-	-	-	-	
26.5-25	20	69.0	27.2	50	181	B	E3	18200	-	-	-	-	-	-	-	-	-	-	
					203	A2	L3	24300	25400	26600	27900	29150	30000	30900	32000	33100	34200	-	
					188	B	E3	18200	19300	20400	21300	22100	-	-	-	-	-	-	
29.5-25	28	73.7	30.3	45	207	A2	L3	28350	30000	30900	33100	34200	35300	37550	38650	-	-	-	
					193	B	E3	22100	22750	24050	25400	-	-	-	-	-	-	-	

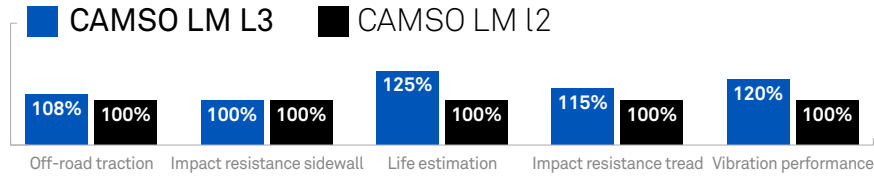

Durability and stability are key issues for loader applications on mixed and hard surfaces. Camso LM L3 enhances tread life and impact resistance with a high lug-to-void ratio and engineered non-directional tread pattern. Additionally, a heavy-duty carcass improves stability.

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)

