

CAMSO 4L 13



TELEHANDLERS



WHEEL
LOADERS



MINI-
DUMPERS



A SMOOTH RIDE WITH ENHANCED TRACTION

Provides exceptional versatility and durability in both on- and off-road applications. Reduces vibrations for enhanced driving comfort while providing excellent traction in off-road conditions.

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO 4L I3



VERSATILE DIRECTIONAL TREAD PATTERN WITH CENTER BLOCK

- Reduces vibrations and enhances driving comfort

HAULER STEPPED TREAD DESIGN

- Maximizes tread cleanout in off-road conditions for improved traction

OPEN SHOULDER TREAD DESIGN

- Provides excellent traction in off-road conditions


HEAVY-DUTY CARCASS

- Provides excellent stability and side impact resistance

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]							
											On other vehicles					On counterbalanced lift trucks		
											Inflation pressure [bar] [PSI]	Creep	10 km/h 6 mph	15 km/h 9 mph	50 km/h 30 mph	Inflation pressure [bar] [PSI]	Load wheel	Steering wheel
10.5-18	10	9x18	9SDC	891	269	25	126	B	R-4	-	3,75	4250	3060	2805	1905	4,50	3060	2550
				35.1	10.6	31					54	9400	6750	6200	4200	64	6750	5650
10.5-20	10	9x20	9SDC	950	278	22	128	B	R-4	-	3,75	4500	2970	-	2015	4,25	3240	2700
				37.4	10.9	28					54	9950	3240	2970	4450	61	7150	5950
12.5-20	12	11x20	11SDC 12SDC 12	1054	348	23	132	B	R-4	-	3,50	5000	7150	6550	2240	4,25	3600	3000
				41.5	13.7	29					50	11050	3600	3300	4950	61	7950	6600
14.5-20	14	11x20	11SDC 12SDC 12	1107	359	27	138	B	R-4	-	3,50	5900	7950	7300	2645	4,25	4250	3540
				43.6	14.1	34					50	13000	4250	3895	5850	61	9400	7800
405/70-20 (16/70-20)	14	13x20	13SDC	1081	442	26	154	A8	R-4	FREE	3,50	6190	9400	8600	3375	5,50	5365	4500
				42.6	17.4	33					50	13650	5250	4990	7450	79	11850	9950
				1081	442	26	142			DRIVE	3,50	6230	11600	11000	2385	5,50	5365	4500
				1.7	0.7	33					50	13750	3710	3525	5250	79	11850	9950
405/70-24 (16/70-24)	14	13x24	13SDC	1188	421	27	156	A8	R-4	FREE	3,50	6600	8200	7800	3600	4,50	5720	4800
				46.8	16.6	34					50	14550	5600	5320	7950	64	12650	10600
				1188	421	27	144			DRIVE	3,50	6580	12350	11750	2520	4,50	5720	4800
				46.8	16.6	34					50	14550	3920	3725	5550	64	12650	10600

IMPACT RISK FACTOR

Impact risk factor is calculated based on the carcass resistance and the lug/void ratio

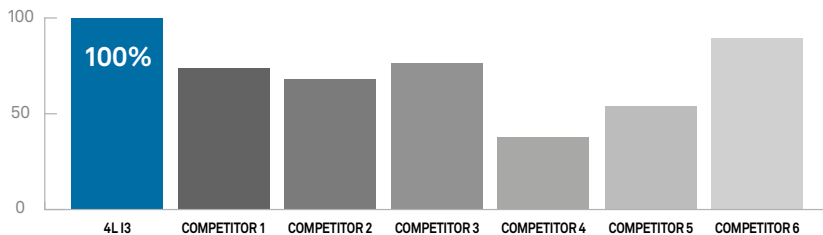

The Camso 4L I3 shows the **highest resistance to impact** based on the optimized lug-to-void ratio and the carcass resistance when compared to 6 competitors on the 405/70-20. Having the lowest impact risk factor means that our tire is the most resistant and runs a lower risk of having a flat tire.

AUTHORIZED DISTRIBUTOR:

camso.co

