

CAMSO WHL 753R

FORMERLY SOLIDEAL SRGP



WHEEL
LOADERS



MOTOR
GRADERS



ARTICULATED
DUMP TRUCK



RADIAL PERFORMANCE, VERSATILITY AND DURABILITY

Delivers excellent performance, versatility and durability. With enhanced stability, ride quality and traction, it's the best choice for both one-star and two-star applications.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



CAMSO

ROAD
FREE
COMPANY

CAMSO WHL 753R



HEAVY-DUTY DUAL-STAR CARCASS

- Enhances stability and suitability for both one-star and two-star applications

OFFSET, TAPERED TREAD LUGS

- Reduces vibration for improved ride quality



OPTIMIZED TREAD PATTERN

- Provides excellent durability and low wear rate


NON-DIRECTIONAL STEPPED DESIGN

- Enhances cleanout for improved traction

| TIRE SIZE | TYPE | RIM SIZE | TIRE DIMENSIONS | | | APPLI-CATION | SI | LI | INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb] | | | | | | | | | | | | | |
|-----------|------|-----------|-----------------|----------------|--------------------|--------------|-----|---------|--|------|---------|-------|-------|-------|-------|-------|--------------|-------|-------|--------------|-------|-------|
| | | | O.D. [mm] [in] | O.W. [mm] [in] | O.T.D. [mm] [32nd] | | | | KPa | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | | | |
| | | | PSI | 29 | 36 | | | | 44 | 51 | 58 | 65 | 73 | 80 | 87 | 94 | | | | | | |
| 17.5R25 | TBL5 | 14.00/1.5 | 1342 | 447 | 26 | Loader* | A2 | 176/182 | kg | 3650 | 4250 | 4850 | 5600 | 6000 | 6500 | 7100 | 7500 | 8000 | 8500 | | | |
| | | | | | | | B | 157/167 | kg | - | - | 3550 | 4000 | 4375 | 4750 | 5150 | 5450 (5.25) | - | - | | | |
| | | | | | | Grader* | A8 | 153 | kg | 2650 | 3075 | 3650 | 4000 | 4375 | 4750 | - | - | - | - | | | |
| | | | 20.5R25 | TBL5 | 17.00/2.0 | 1483 | 512 | 31 | Loader* | A2 | 186/193 | kg | 4750 | 5600 | 6300 | 7100 | 8000 | 8750 | 9500 | 10000 | 10900 | 11500 |
| | | | | | | | | | | B | 168/177 | kg | - | - | 4750 | 5300 | 5800 | 6500 | 6900 | 7300 (5.25) | - | - |
| | | | | | | | | | Grader* | A8 | 161/170 | kg | 3450 | 4125 | 4625 | - | - | - | - | - | - | - |
| 23.5R25 | TBL5 | 19.50/2.5 | 1615 | 624 | 33 | Loader* | A2 | 190/201 | kg | 6000 | 7100 | 8250 | 9250 | 10300 | 11200 | 12150 | 12850 | 13600 | 14500 | | | |
| | | | | | | | B | 176/185 | kg | - | - | 6000 | 6700 | 7500 | 8250 | 9000 | 9250 (5.25) | - | - | | | |
| | | | | | | Grader* | A8 | 161/170 | kg | 4500 | 5300 | 6000 | - | - | - | - | - | - | - | | | |
| | | | 26.5R25 | TBL5 | 22.00/3.0 | 1746 | 704 | 37 | Loader* | A2 | 202/209 | kg | 7500 | 9000 | 10300 | 11500 | 12850 | 14000 | 15000 | 16000 | 17000 | 18500 |
| | | | | | | | | | | B | 184/193 | kg | - | - | 7500 | 8500 | 9500 | 10300 | 11200 | 11500 (5.25) | - | - |
| | | | | | | | | | EM** | B | 184/193 | lb | - | - | 16500 | 18700 | 20900 | 22700 | 24700 | 25400 (76) | - | - |
| 29.5R25 | TBL5 | 25.00/3.5 | 1870 | 782 | 38 | Loader* | A2 | 208/216 | kg | - | - | - | - | 15500 | 17000 | 18000 | 19500 | 20600 | 22400 | | | |
| | | | | | | | B | 191/200 | kg | - | - | 9250 | 10300 | 11500 | 12500 | 13600 | 15000 (5.25) | - | - | | | |
| | | | | | | EM** | B | 191/200 | lb | - | - | 20400 | 22700 | 25400 | 27600 | 30000 | 33100 (76) | - | - | | | |


NEW TIRE

Lug-to-void: 55%

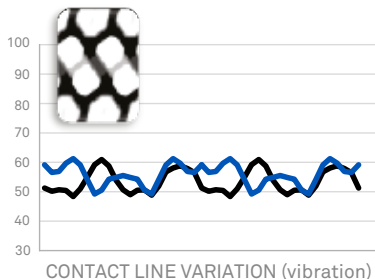

25% WORN TIRE

Lug-to-void: 65%

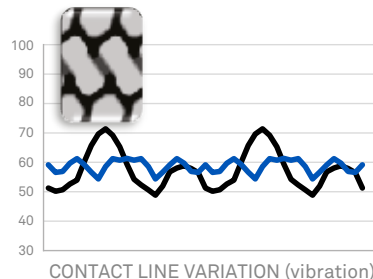

■ CAMSO WHL 753R

■ COMPETITOR 1

Patented tread design to minimize vibrations:
 Poor ride quality caused by high vibration when operating on hard surfaces can affect operator comfort and overall machine performance. The Camso WHL 753R provides **improved ride quality** throughout its tread life.

AUTHORIZED DISTRIBUTOR:

camso.co

