

CAMSO XTRA WALL



SKID STEER
LOADERS



BUILT FOR TOUGH OFF-ROAD APPLICATIONS

The ideal skid steer tire solution for most tough, off-road skid steer applications. Delivers enhanced durability, traction and side impact resistance for excellent performance and low operating costs.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO XTRA WALL



WIDE, DEEP LUG DESIGN

- Provides enhanced durability and traction in off-road conditions

HAULER STEPPED TREAD DESIGN

- Provides enhanced cleanout for improved traction



REINFORCED SIDEWALL


- Provides improved side impact resistance

RIM PROTECTOR

- Protects wheel from impact damage

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar]	MAXIMUM TIRE LOAD [kg]		
		RECOMMENDED	ALTERNATIVE	O.D [mm]	O.W [mm]	O.T.D [mm]				8 km/h	16 km/h	Static
5.70-12	6	4.50I	5JA	566	152	13.0	93	A2	4.20	660	520	1040
23x8.5-12	6	7.00I	7JA	572	213	14.5	101	A2	3.50	825	650	1300
23x8.5-12	12	7.00I	7JA	586	231	14.5	115	A2	7.00	1235	980	1950
26x12-12	10	10.50	8.50/8.50JA	655	297	21.5	124	A2	4.50	1630	1290	2580
27x10-12	14	8.00G	-	700	265	19.0	132	A2	7.00	3545	2800	4640
7.00-15	6	5.50	6LB	775	222	16.0	121	A2	4.10	1440	1140	2280
27x8.5-15	6	7JA	6.5K/7J	679	213	15.0	112	A2	3.10	1125	890	1780
31x15.5-15	8	13.00	13LB	788	384	24.0	126	A2	3.10	1690	1340	2670
26x12-16.5 (300/40-16.5)	10	9.75	-	663	283	23.5	124	A2	4.00	1630	1290	2580
10-16.5	6	8.25	-	763	275	17.5	124	A2	3.15	1590	1260	2510
10-16.5	8	8.25	-	763	275	17.5	129	A2	4.20	1875	1480	2960
10-16.5	10	8.25	-	765	276	17.5	134	A2	5.25	2140	1690	3380
12-16.5	8	9.75	-	826	319	18.0	135	A2	3.50	2180	1720	3440
12-16.5	10	9.75	-	820	318	18.0	140	A2	4.50	2545	2010	4020
12-16.5	12	9.75	-	824	321	18.0	145	A2	5.60	2880	2280	4550
14-17.5	12	10.50	-	912	351	31.0	152	A2	4.80	3550	2800	5610

VERTICAL DEFLECTION CHART (1875 kg load) 10-16.5 8PR inflated 5.2 bar (61 PSI)

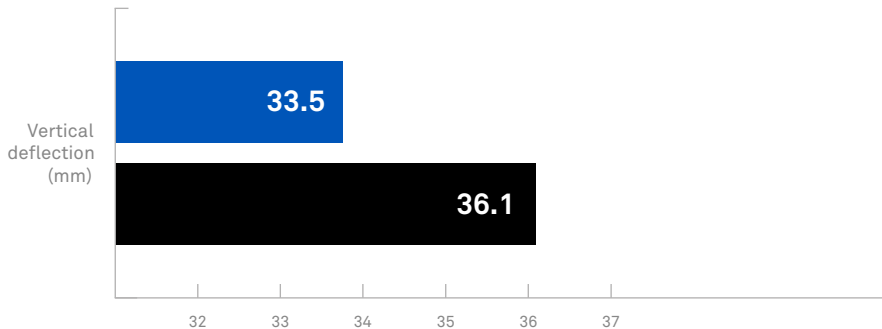

■ CAMSO XTRA WALL

■ STANDARD R4

Camso Xtra Wall's heavy-duty carcass and sidewall design resists deflection under load and is **more robust and stable** than a standard R4 tire.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL